




Bearing Rolamentos do Brasil Ltda.

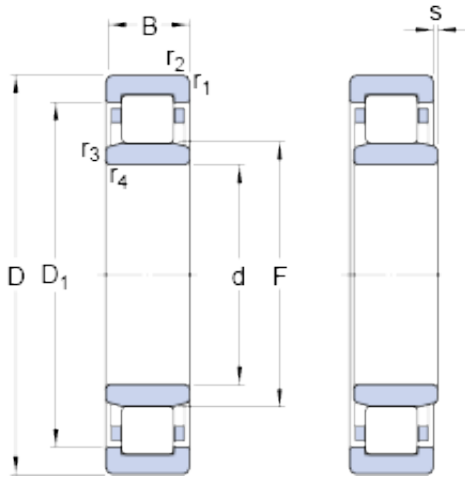

130 mm x 230 mm x 64 mm SKF NU 2226 ECML thrust ball bearings

Bearing No. NU 2226 ECML

NU 2226 ECML Bearing 2D drawings and 3D CAD models

| | |
|---|---------------|
| Size | 230x130x64 mm |
| Bore Diameter | 230 mm |
| Outer Diameter | 130 mm |
| Width | 64 mm |
| d | 130 mm |
| D | 230 mm |
| B | 64 mm |
| D ₁ | 201.2 mm |
| F | 153.5 mm |
| r _{1,2} - min. | 3 mm |
| r _{3,4} - min. | 3 mm |
| s | 4.3 mm |
| d _a - min. | 144 mm |
| d _a - max. | 150 mm |
| d _b - min. | 157 mm |
| D _a - max. | 215.4 mm |
| r _a - max. | 2.5 mm |
| r _b - max. | 2.5 mm |
| Basic dynamic load rating - C | 610 kN |
| Basic static load rating - C ₀ | 735 kN |
| Fatigue load limit - P _u | 83 kN |
| Reference speed | 3200 r/min |
| Limiting speed | 5300 r/min |
| Calculation factor - k _r | 0.3 |
| | |



Bearing Rolamentos do Brasil Ltda.

| | |
|---------------------------|---|
| Category | Cylindrical Roller Bearings |
| Inventory | 0.0 |
| Manufacturer Name | SKF |
| Minimum Buy Quantity | N/A |
| Weight / Kilogram | 12.08 |
| EAN | 7316571388649 |
| Product Group | B04144 |
| Bore Profile | Straight |
| Cage Material | Brass |
| Precision Class | RBEC 1 ISO P0 |
| Number of Rows of Rollers | Single Row |
| Separable | Inner Ring - Both Sides |
| Rolling Element | Cylindrical Roller Bearing |
| Profile | Complete with Outer and Inner Ring |
| Snap Ring | No |
| Internal Clearance | C0-Medium |
| Retainer | Yes |
| Relubricatable | Yes |
| Inch - Metric | Metric |
| Other Features | High Capacity Plain Inner Ring 2 Rib Outer Ring Cage on Outer Ring ID |
| Long Description | 130MM Bore; Straight Bore Profile; 230MM Outside Diameter; 64MM Width; Brass Cage Material; RBEC 1 ISO P0; Single Row; Inner Ring - Both Sides Separable; No Snap Ring; Relubricatable; C0-Medium Int |
| Category | Cylindrical Roller Bearing |
| UNSPSC | 31171547 |
| Harmonized Tariff Code | 8482.50.00.00 |
| Noun | Bearing |



Bearing Rolamentos do Brasil Ltda.

| | |
|------------------------------|---|
| Manufacturer URL | http://www.skf.com |
| Manufacturer Item Number | NU 2226 ECML |
| Weight / LBS | 26.616 |
| Width | 2.52 Inch 64 Millimeter |
| Outside Diameter | 9.055 Inch 230 Millimeter |
| Bore | 5.118 Inch 130 Millimeter |
| bore diameter: | 130 mm |
| static load capacity: | 735 kN |
| outside diameter: | 230 mm |
| maximum rpm: | 5300 rpm |
| overall width: | 64 mm |
| bearing material: | Steel |
| flanges: | (2) Flanges on outer Ring, Flangeless Inner Ring |
| cage material: | Brass |
| bore type: | Straight |
| finish/coating: | Uncoated |
| number of rows: | 1 |
| closure type: | Open |
| operating temperature range: | Maximum 302 ° F |
| series: | NU |
| dynamic load capacity: | 610 kN |
| manufacturer upc number: | 7316571388649 |
| D_1 | 201.2 mm |
| $r_{1,2}$ min. | 3 mm |
| $r_{3,4}$ min. | 3 mm |
| s max. | 4.3 mm |
| d_a min. | 144 mm |
| d_a max. | 150 mm |
| d_b min. | 157 mm |
| D_a max. | 215.4 mm |
| r_a max. | 2.5 mm |



Bearing Rolamentos do Brasil Ltda.

| | |
|--------------------------------|------------|
| r_b max. | 2.5 mm |
| Basic dynamic load rating C | 610 kN |
| Basic static load rating C_0 | 735 kN |
| Fatigue load limit P_u | 83 kN |
| Calculation factor k_r | 0.3 |
| Limiting value e | 0.3 |
| Axial load factor Y | 0.4 |
| Mass bearing | 11.3 kg |
| Angle ring | HJ 2226 EC |