




Bearing Rolamentos do Brasil Ltda.

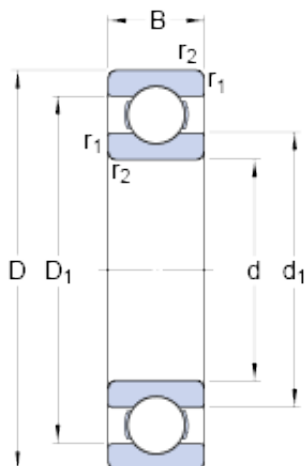

300 mm x 380 mm x 38 mm SKF 61860 deep groove ball bearings

Bearing No. 61860

61860 Bearing 2D drawings and 3D CAD models

| | |
|---|--------------------------|
| Size | 380x300x38 mm |
| Bore Diameter | 380 mm |
| Outer Diameter | 300 mm |
| Width | 38 mm |
| d | 300 mm |
| D | 380 mm |
| B | 38 mm |
| d ₁ | 325.7 mm |
| D ₁ | 354.3 mm |
| r _{1,2} - min. | 2.1 mm |
| d _a - min. | 309 mm |
| D _a - max. | 371 mm |
| r _a - max. | 2 mm |
| Basic dynamic load rating - C | 172 kN |
| Basic static load rating - C ₀ | 245 kN |
| Fatigue load limit - P _u | 5.6 kN |
| Reference speed | 3200 r/min |
| Limiting speed | 2000 r/min |
| Calculation factor - k _r | 0.015 |
| Calculation factor - f ₀ | 17.1 |
| Category | Single Row Ball Bearings |
| Inventory | 0.0 |
| Manufacturer Name | SKF |
| Minimum Buy Quantity | N/A |



Bearing Rolamentos do Brasil Ltda.

| | |
|---------------------------------|---|
| Weight / Kilogram | 0 |
| EAN | 7316574243167 |
| Product Group | B00308 |
| Enclosure | Open |
| Precision Class | ABEC 1 ISO P0 |
| Maximum Capacity / Filling Slot | No |
| Rolling Element | Ball Bearing |
| Snap Ring | No |
| Internal Special Features | No |
| Cage Material | Steel |
| Internal Clearance | C0-Medium |
| Inch - Metric | Metric |
| Long Description | 300MM Bore; 380MM Outside Diameter; 38MM Outer Race Width; Open; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage |
| Other Features | Deep Groove |
| Category | Single Row Ball Bearing |
| UNSPSC | 31171504 |
| Harmonized Tariff Code | 8482.10.50.68 |
| Noun | Bearing |
| Keyword String | Ball |
| Manufacturer URL | http://www.skf.com |
| Weight / LBS | 8.9 |
| Outside Diameter | 14.961 Inch 380 Millimeter |
| Outer Race Width | 1.496 Inch 38 Millimeter |
| Inner Race Width | 0 Inch 0 Millimeter |
| Bore | 11.811 Inch 300 Millimeter |
| d ₁ | 325.7 mm |



Bearing Rolamentos do Brasil Ltda.

| | |
|--------------------------------|----------|
| D_1 | 354.3 mm |
| $r_{1,2}$ min. | 2.1 mm |
| d_a min. | 309 mm |
| D_a max. | 371 mm |
| r_a max. | 2 mm |
| Basic dynamic load rating C | 172 kN |
| Basic static load rating C_0 | 245 kN |
| Fatigue load limit P_u | 5.6 kN |
| Calculation factor k_r | 0.015 |
| Calculation factor f_0 | 17.1 |
| Mass bearing | 8.9 kg |