




## Bearing Rolamentos do Brasil Ltda.

22 mm x 44 mm x 12 mm NTN 60/22N deep groove ball bearings

Bearing No. 60/22N

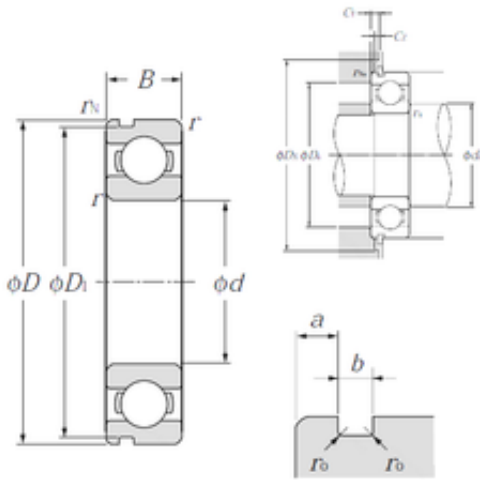

60/22N Bearing 2D drawings and 3D CAD models

|                               |             |
|-------------------------------|-------------|
| Size                          | 22x44x12 mm |
| Bore Diameter                 | 22 mm       |
| Outer Diameter                | 44 mm       |
| Width                         | 12 mm       |
| d                             | 22 mm       |
| D                             | 44 mm       |
| B                             | 12 mm       |
| C                             | 12 mm       |
| rn                            | 0,5 mm      |
| a                             | 2,06 mm     |
| b                             | 1,35 mm     |
| r min.                        | 0,6 mm      |
| r0 max.                       | 0,4 mm      |
| D1                            | 41,75 mm    |
| da min.                       | 26 mm       |
| da max                        | 26,5 mm     |
| Da max.                       | 40 mm       |
| ra max.                       | 0,6 mm      |
| Dx                            | 49 mm       |
| Cy                            | 2,9 mm      |
| Cz                            | 1,2 mm      |
| rn                            | 0,5 mm      |
| Weight                        | 0,074 Kg    |
| Basic dynamic load rating (C) | 9,4 kN      |
| Basic static load rating (C0) | 5,05 kN     |



## Bearing Rolamentos do Brasil Ltda.

|                            |              |
|----------------------------|--------------|
| (Grease) Lubrication Speed | 17 000 r/min |
| (Oil) Lubrication Speed    | 20 000 r/min |